



**Step 1:** Remove the left upper bracket that secures the plastic insert into the light side channel. The are highlight below.

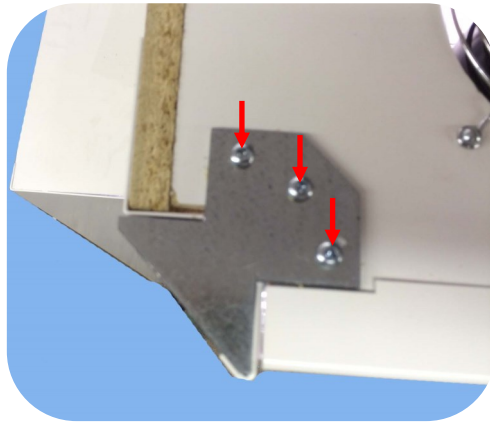

**Step 2:** Insert the AC harness into the slot and then inside the cabinet.

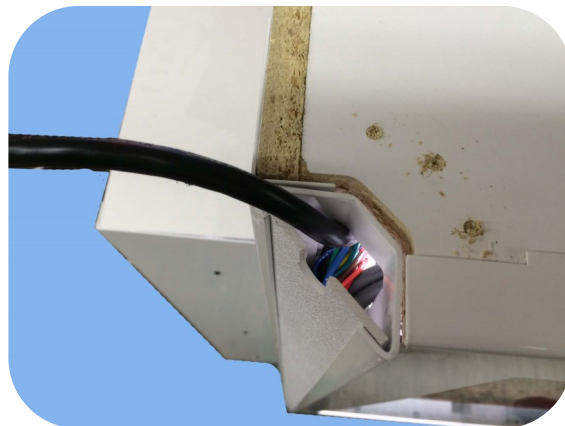

**Step 3:** Locate the three wire AC plug (white/green/blue) in the upper left side of the cabinet. Disconnect and plug the marquee between the two to complete the AC connection.

